


## REMOVAL

1. REMOVE FRONT PASSENGER AIRBAG ASSEMBLY  
(See page [RS-28](#) )



2. REMOVE A/C AMPLIFIER
  - (a) Disconnect the connector.
  - (b) Using a screwdriver, release the claw and remove the A/C amplifier.

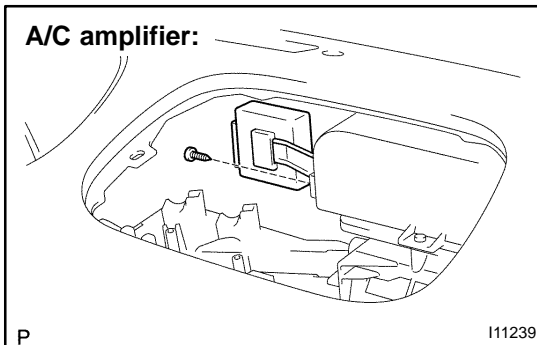