


REASSEMBLY

1. INSTALL SEATBACK LOCK

- (a) Install the seatback lock to the seatback frame with the 2 bolts.
- (b) Use the same manner described above to the other side.

2. INSTALL SEATBACK FRAME

- (a) Install the seatback frame to the seatback cover with pad.
- (b) Install the seatback lock knob holder and 2 headrest supports.

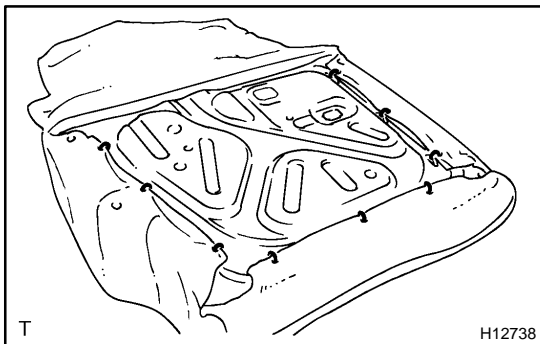


- (c) Install the hog rings as shown in the illustration.

HINT:

When installing hog rings, take care to prevent wrinkles as little as possible.

- (d) Install the seatback lock knob.

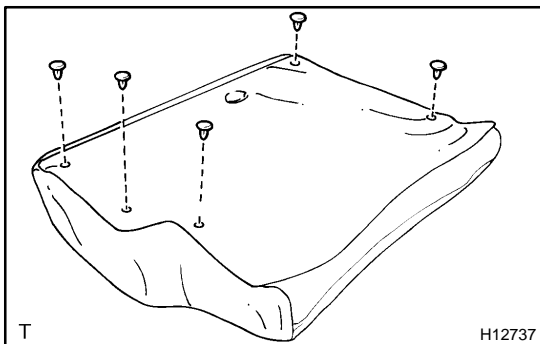

- (e) Install the 5 clips.
- (f) Use the same manner described above to the other side.